

6-GFM(G)-200Ah

Gel Battery Specification


Features

- Maintenance free
- Safety and no leakage
- Excellent recharge and discharge performance
- Low self-discharge rate
- Adapt to high or low temperature
- Good deep discharge performance
- Longer cycle life



Specification

Rated Voltage	12V
Numbers of cells	6 Cells
Capacity	200Ah@10hr-rate to 1.80V per cell @25°C
Weight	62.4kg
Internal Resistance	Approx. 3.5mΩ
Terminal	F1 / F2
Max. Discharge Current	3000A(5s)
Short Circuit Current	10000A
Max. Charging Current	50A
Reference Capacity	C10 200.0AH C3 144.7AH C1 110.1AH
Design Life	10~15 years
Float Charging Voltage	13.6 V~13.8 V @ 25°C Temperature Compensation: -20mV/°C/Cell
Cycle Use Voltage	14.4 V~14.9 V @ 25°C Temperature Compensation: -30mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	Less than 3% at 25°C per month
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

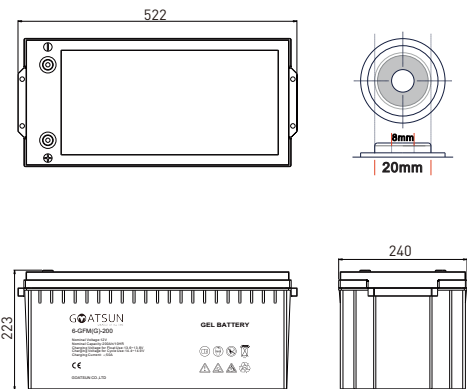

Length	522±2mm (20.6 inches)
Width	240±1mm (9.4 inches)
Height	219±1mm (8.6 inches)
Total Height	223±1mm (8.8 inches)

Constant Current Discharge Characteristics: A[25°C]

F.V/Time	20min	30min	45min	1h	2h	3h	5h	6h	8h	10h	20h
1.80V/cell	212.97	163.08	122.75	102.86	63.96	48.24	33.85	29.23	23.30	20.00	10.99
1.75V/cell	239.34	179.34	132.75	110.11	67.80	50.99	35.16	30.22	24.07	20.44	11.21
1.70V/cell	257.80	192.09	140.99	116.48	71.87	53.08	36.26	31.32	24.73	20.88	11.32
1.65V/cell	268.35	199.56	145.93	120.88	73.74	54.84	37.03	31.76	25.16	21.21	11.43
1.60V/cell	290.77	213.63	156.81	128.35	76.70	57.03	38.13	32.53	25.60	21.54	11.65


Constant Power Discharge Characteristics: WPC[25°C]

F.V/Time	20min	30min	45min	1h	2h	3h	5h	6h	8h	10h	20h
1.80V/cell	402.31	311.32	236.37	199.23	124.51	94.29	66.59	57.58	46.15	39.89	21.87
1.75V/cell	447.14	339.23	253.63	212.20	131.43	99.34	68.90	59.45	47.58	40.66	22.31
1.70V/cell	476.37	360.22	267.36	223.19	138.68	103.19	70.88	61.43	48.90	41.54	22.53
1.65V/cell	490.33	370.33	274.95	230.33	141.54	105.93	72.20	62.31	49.56	41.98	22.75
1.60V/cell	525.38	392.64	293.19	243.19	146.59	109.67	74.18	63.52	50.33	42.75	23.08


6-GFM(G)-200Ah

Gel Battery Specification


Charge Characteristics for Float Use @ 25°C/77°F

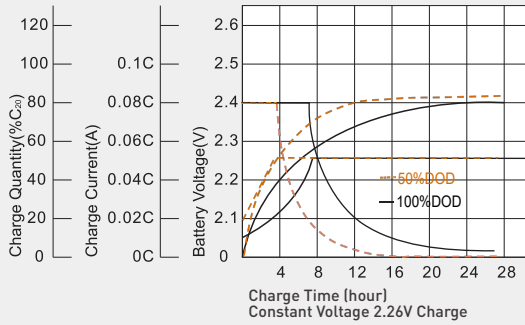


Discharge Characteristics at Various Rates @ 25°C/77°F

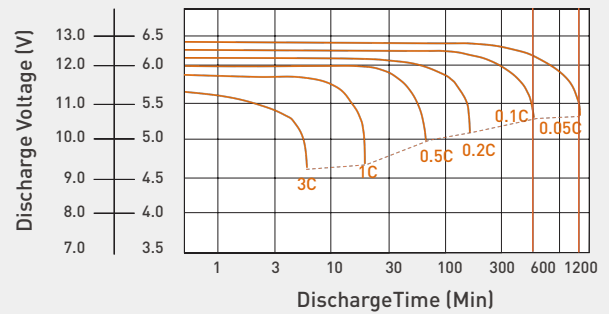


Cycle Life in Relation to Depth of Discharge

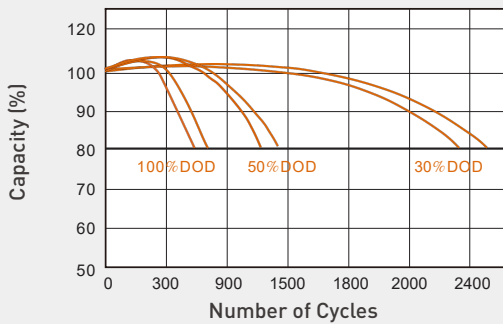


Float Service Life

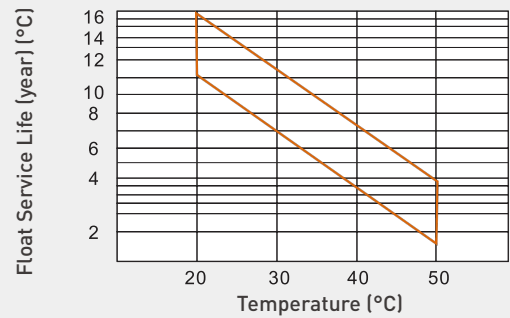


Temperature and Valid Capacity

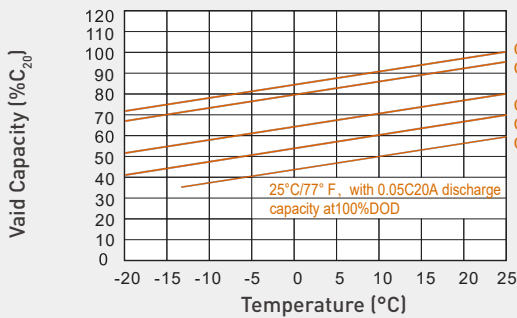


Self Discharge Characteristics

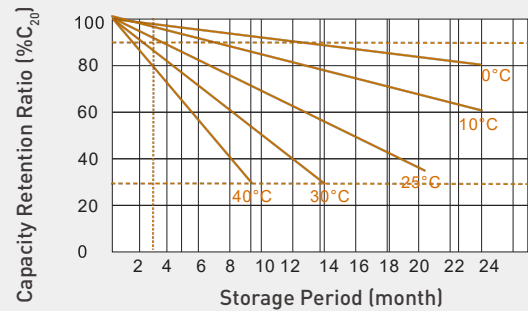

Capacity and Open Circuit Voltage

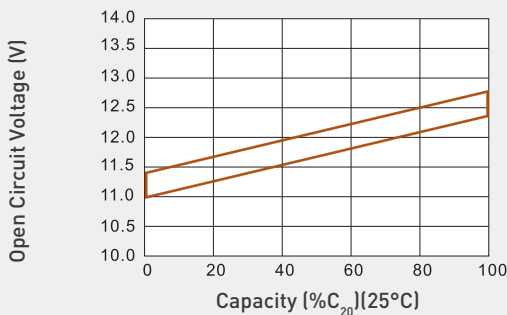

Relationship between Charging Voltage and Temperature

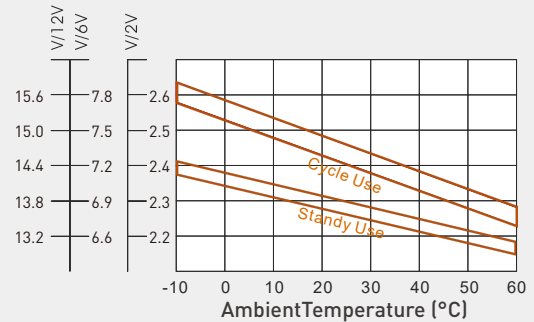

GOATSUN CO.,LTD.

0086-18855172605

info@goatsun.com

www.goatsun.com